


DOVER PLAINS, NY

PROPOSED SKATEPARK

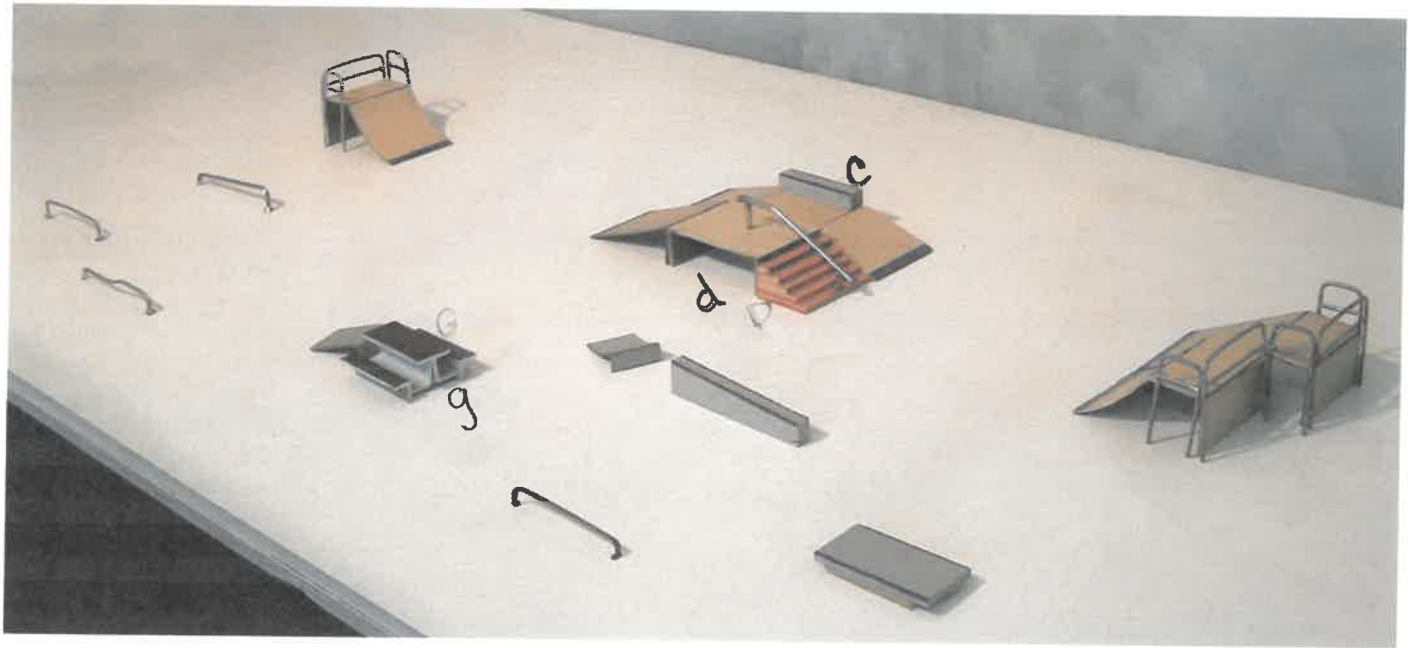

EQUIPMENT SPECIFICATION OVERVIEW

GALVANIZED STEEL PERMANENT SKATE PARK EQUIPMENT

BOCA rated 42" tall safety railings.

No solid panels.

Safety side railings held 12" from coping.

No skating obstruction.

Side railings are removable for joining ramps.

Ramp joining of all sizes.

Schedule 40 pipe coping with 1/4 " peg grinds.

Deck surface protection.

HDPE or Wolminized Laminate subsurface.

No degradable products.

Phenolic skating surface (Skatelite Pro).

No hot and noisy steel surfaces.

1/4 " steel surface edge protection.

Ramp surface protection.

10 ga. contoured steel threshold.

No 1/4 " flat transition onto curved ramp.

All wear components, surface, copings, grinds and thresholds are nut and bolt replaceable.

No cutting and welding on site.

Fasteners are countersunk 1/4 " stainless steel bolts with nylock flanged locking nuts.

No stripping screws.

Three sided 9 ga. steel side screening.


No kids or debris under ramps.

All steel construction is fabricated, welded and machine finished prior to a six stage hot dip galvanizing process.

No paint or powder coating that WILL chip.

Ramps have no graffiti friendly surfaces.

All ramps rest on 3/4" threaded leveling plates.

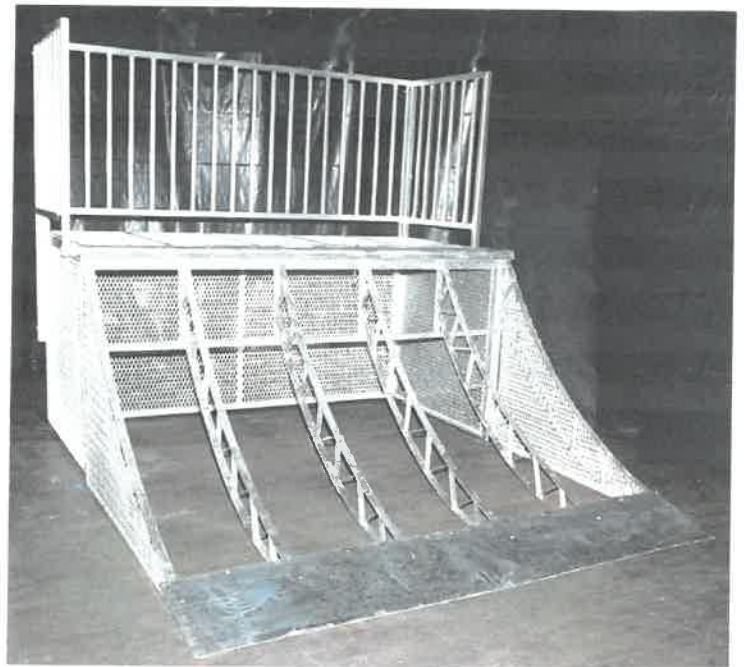


RAMPAGE, LLC 1625 RAILROAD AVE BRIDGEPORT, CT. 06605
203-521-2324 203-452-9061 fax skate@skateparkramps.com

RAMPAGE GALVANIZED STEEL SKATEPARK EQUIPMENT

SAFETY RAILINGS 42" TALL SET BACK FROM COPINGS

ONE PIECE 1/4" STEEL COPINGS AND GRIND ANGLES
WITH 6" PEGPLATES ON ALL DECKS

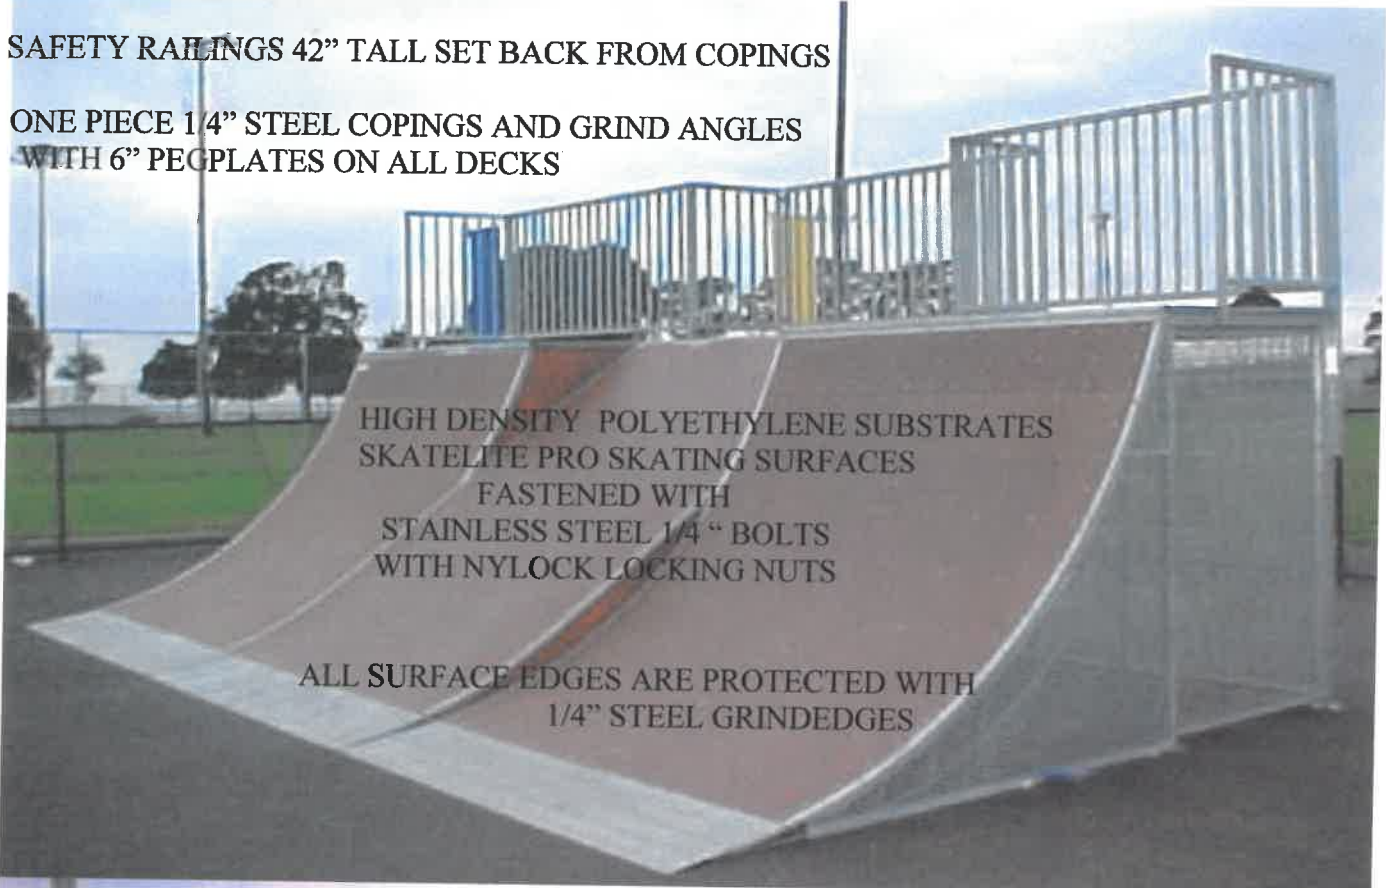

HIGH DENSITY POLYETHYLENE SUBSTRATES
SKATELITE PRO SKATING SURFACES
FASTENED WITH
STAINLESS STEEL 1/4" BOLTS
WITH NYLOCK LOCKING NUTS

ALL SURFACE EDGES ARE PROTECTED WITH
1/4" STEEL GRINDEDGES

CUSTOM RAILING FITS TO ALLOW FOR THRESHOLD ALIGNMENT
AND RAMP TRANSFER



GALVANIZED STEEL RAMP ENCLOSURES

3/4" ADJUSTABLE FOOT PADS

1625 Railroad Ave.
Bridgeport, CT 06605

| Date | Estimate # |
|----------|------------|
| 2/2/2007 | 125 |

| Name / Address |
|--------------------|
| Dover, NY J |

| | | | Project |
|---|-----|-------------------------|--------------------|
| Description | Qty | Rate | Total |
| Bank 4' x 8' | | 2,996.00 | 2,996.00 |
| Quarterpipe 4' x 8' | | 2,996.00 | 2,996.00 |
| Bauerbox 24"x 8' x 24' | | 4,240.00 | 4,240.00 |
| Bauerbox 30" x 8' x 28' with 8' deck, stairs and handrail | | 4,590.00 | 4,590.00 |
| Grindbox 1' x 1' x 7' | | 1,120.00 | 1,120.00 |
| Quarterpipe 5' x 8' | | 3,304.00 | 3,304.00 |
| Steel Picnic Table 3' x 7' x 26" | | 2,660.00 | 2,660.00 |
| Grind Table 1' x 3' x 8' | | 810.00 | 810.00 |
| Grindbox 1' x 1' x 7' Slant | | 1,120.00 | 1,120.00 |
| Wedge 12" x 36" | | 196.00 | 196.00 |
| Launchramp 12" x 36" | | 196.00 | 196.00 |
| Grindrail Square 8' Slant | | 165.00 | 165.00 |
| Square Kinked Grindrail | | 220.00 | 220.00 |
| Grindrail Round 8' | | 165.00 | 165.00 |
| Grindrail Square 8' | | 165.00 | 165.00 |
| Freight Charge | | 1,120.00 | 1,120.00 |
| Installation | | 1,800.00 | 1,800.00 |
| | | Subtotal | \$27,863.00 |
| | | Sales Tax (0.0%) | \$0.00 |
| | | Total | \$27,863.00 |